


Product specification

Sprocket

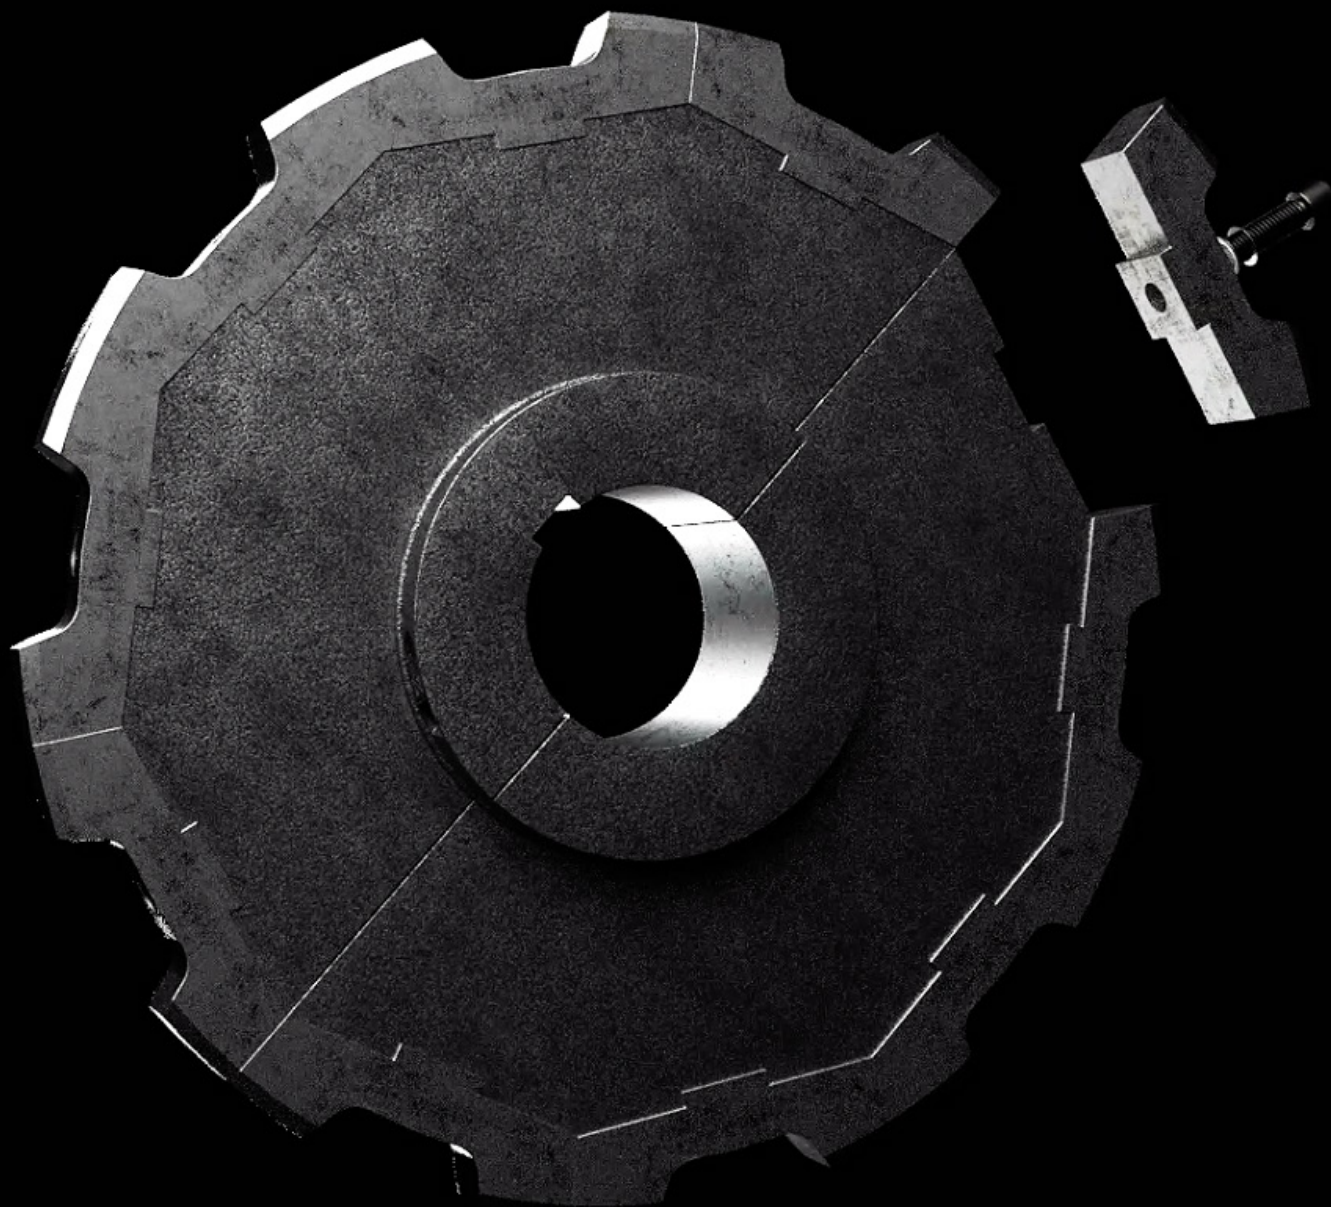

**Nordic
Quick
Systems**

**Replaceable
wear parts.**

Product specification

Sprocket

Nordic Quick Systems supplies sprockets to a high degree of precision. All sprockets are produced to order and adapted to customer requirements. With rotatable and replaceable wear parts, we can replace all types of chain drive.

Type of sprocket	Conveyor sprockets, roller sprockets, drive drums, flat tail sprockets, etc. The sprocket body is supplied split as standard, but solid bodies can also be produced. The sprockets can be equipped with a bearing-mounted hub or tensioning element, upon request.
Size	Nordic Quick Systems manufactures sprockets in all sizes, irrespective of diameter, size and hub.
Type of chain	We can supply sprockets for most types of chain.
Material	The sprocket body is mostly produced from standard structural steel, S355J. The wear parts are produced primarily from wear plate with a nominal hardness of 400-500 HBW, or alternatively from engineering plastic. All choices of material are adapted to customer requirements.
Accessories	The wear parts and sprocket halves are secured with Nord-Lock washers (except plastic wear parts) and 12.9 bolts.
Contour	The contour of the wear parts is produced to a high degree of precision to ensure a low-impact chain drive.
Miscellaneous	All split sprocket bodies are equipped with supporting bosses between the sprocket halves, ensuring an optimum split. To eliminate the risk of abrasion, the sprocket body is slightly narrower than its wear parts.
Wear indicators	As of December 2019, all sprockets are provided with wear indicators (except in the USA, Canada and Japan). One wear part on each sprocket is provided with markings on its sides. When the wear reaches these markings, the wear parts should be rotated or replaced to avoid the risk of breakdown.